MC 126

SIX CHANNEL POWER AMPLIFIER

CONFIGURABLE TO 5, 4 OR 3 CHANNELS

FRONT PANEL: **Glass with illuminated teal/gold nomenclature. Remote ON indicator light.** 7 **POWER GUARD lights for LEFT FRONT, CENTER, RIGHT FRONT, LEFT SURRound, BACK SURRound, and RIGHT SURRound. POWER switch: OFF or ON.**

BACK PANEL: **POWER switch: LOCAL or REMOTE. Power cord receptacle. FUSE. [Right front and surround section: RIGHT SURRound and RIGHT FRONT/MONO INPUTS. RIGHT SURRound and RIGHT FRONT LEVEL controls: 2.5V to 1.0V. MODE switch: MONO or STEREO. Speaker OUTPUTS terminals: RIGHT SURRound, RIGHT FRONT and MONO]. [Back surround and center channel section: BACK SURRound and CTR/MONO INPUT. BACK SURRound and CENTER/MONO LEVEL controls: 2.5V to 1.0V. MODE switch: MONO or STEREO. Speaker OUTPUTS terminals: BACK SURRound, CENTER and MONO]. MULTI-CHANNEL 26 pin INPUT connector. POWER CONTROL jacks: IN and OUT. [Left surround and front section: LEFT SURRound and LEFT FRONT/MONO INPUTS. LEFT SURRound and LEFT FRONT/MONO LEVEL controls: 2.5V to 1.0V. Speaker OUTPUT terminals: LEFT SURRound, LEFT FRONT and MONO].**

SPECIFICATIONS: **Six channels. 120w/ch into 4 ohms or 80w/ch into 8 ohms. (275w into 8 ohms mono with 2 channels bridged). *Response:* 20-20kHz (+0 -0.25dB). *Distortion:* 0.005%. *Noise and Hum:* -113dBA. Output direct coupled for 4 to 8 ohms. *Damping Factor:* 100 or greater. *Input impedance:* 20k. *Input Sensitivity:* .8V. *Sentry Monitor*. Direct coupled. *Power Guard*. *Power Requirements:* 120V at 5.9 Amps.**

© 2007-2015 VintageMac – Larry Hodson

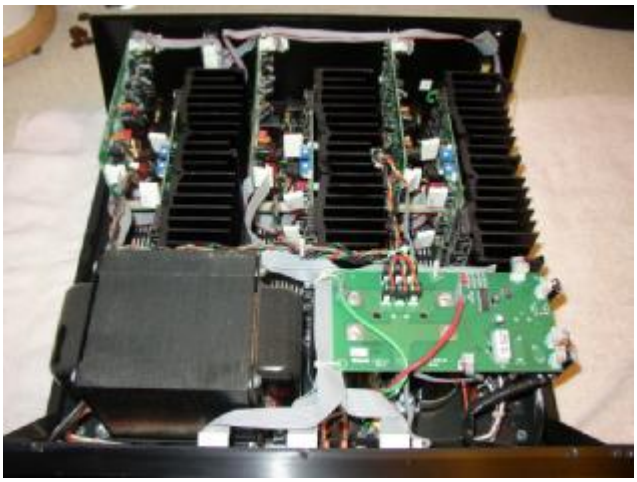

MC 126 - Sold from 2001 - 2003. S/N: TA1001~TA????

Size:* 7-1/8"H, 17-1/2"W and 18"D. *Weight:* 58 lb. *$3,100.00